

# TECHNYL®

## TECHNYL® A 50H1 NATURAL

TECHNICAL DATA SHEET

Revised: May, 2017

TECHNYL® A 50H1 Natural is an unreinforced polyamide 66 based on a non-phosphorous and non-halogenated flame retardant system, heat stabilized, for injection moulding. This flame retardant grade, offers excellent filling qualities combined with good stiffness.

### GENERAL

Material Status	• Commercial: Active	
Availability	• Africa & Middle East • Asia Pacific	• Europe
Additive	• Flame Retardant	• Heat Stabilizer
Key Benefits	• F1 UL Classification • Good Mold Release	• UL 94 V0 at 0.4 mm
Applications	• Connectors • Electrical/Electronic Applications	• Junction box • Terminal blocks
Certification/Compliance	• EC 1907/2006 (REACH) • EN 45545	• NF F 16-101 • UL QMF22
RoHS Compliance	• RoHS Compliant	
Colors Available	• Black	• Natural Color
Forms	• Pellets	
Processing Method	• Injection Molding	
Resin ID (ISO 1043)	• PA66 FR(30)	

### PROPERTIES

Typical values of properties are for Natural grades

Physical	Dry	Conditioned Unit	Test Method
Molding Shrinkage			ISO 294-4
Across Flow	1.3	%	
Flow	1.5	%	
Water Absorption			ISO 62
24 hr, 23°C	0.88	%	
Equilibrium, 23°C, 50% RH	2.7	%	
Outdoor Suitability	f1		UL 746C
Density	1.16	g/cm <sup>3</sup>	ISO 1183/A
Mechanical	Dry	Conditioned Unit	Test Method
Tensile Modulus (23°C)	3800	1700 MPa	ISO 527-2/1A
Tensile Stress			ISO 527-2/1A
Yield, 23°C	85	55 MPa	
Break, 23°C	80	45 MPa	
Tensile Strain (Break, 23°C)	12	> 100 %	ISO 527-2

<b>Mechanical</b>	<b>Dry</b>	<b>Conditioned Unit</b>	<b>Test Method</b>
Flexural Modulus			
23°C	3800	1750 MPa	ASTM D790
23°C	3700	1700 MPa	ISO 178
Flexural Strength			
23°C	125	55.0 MPa	ASTM D790
23°C	135	60.0 MPa	ISO 178
Charpy Notched Impact Strength			ISO 179/1eA
-30°C	3.0	kJ/m <sup>2</sup>	
23°C	3.2	7.0 kJ/m <sup>2</sup>	
Charpy Unnotched Impact Strength			ISO 179/1eU
-30°C	90	kJ/m <sup>2</sup>	
23°C	80	No Break kJ/m <sup>2</sup>	
Notched Izod Impact			
23°C	50	J/m	ASTM D256
23°C	3.0	kJ/m <sup>2</sup>	ISO 180
<b>Thermal</b>	<b>Dry</b>	<b>Conditioned Unit</b>	<b>Test Method</b>
Heat Deflection Temperature			
0.45 MPa, Unannealed	237	°C	ISO 75-2/Bf
1.8 MPa, Unannealed	85	°C	ISO 75-2/Af
Melting Temperature	263	°C	ISO 11357-3
<b>Electrical</b>	<b>Dry</b>	<b>Conditioned Unit</b>	<b>Test Method</b>
Surface Resistivity	3.0E+15	1.0E+14 ohms	IEC 60093
Volume Resistivity	3.0E+15	1.0E+12 ohms·cm	IEC 60093
Electric Strength			IEC 60243-1
0.800 mm	33	kV/mm	
2.00 mm	21	kV/mm	
Relative Permittivity	3.50		IEC 60250
Dissipation Factor	0.017		IEC 60250
Comparative Tracking Index (Solution A)	600	V	IEC 60112
<b>Flammability</b>	<b>Dry</b>	<b>Conditioned Unit</b>	<b>Test Method</b>
Flame Rating			UL 94
0.40 mm	V-0		
0.8 mm	V-0		
1.6 mm	V-0		
3.2 mm	V-0		
Glow Wire Flammability Index			IEC
0.8 mm	960	°C	60695-2-12
1.6 mm	960	°C	
3.2 mm	960	°C	

<b>Flammability</b>	<b>Dry</b>	<b>Conditioned Unit</b>	<b>Test Method</b>
Glow Wire Ignition Temperature			IEC
0.40 mm	960	°C	60695-2-13
0.8 mm	960	°C	
1.6 mm	775	°C	
Oxygen Index	33	%	ISO 4589-2
French Fire Index	F2		NF F16-101
French Smoke Index	I2		NF F16-101

<b>Additional Information</b>	<b>Dry Unit</b>	<b>Test Method</b>
European Railways Certifications		EN 45545-2
R22	HL3	
R23	HL3	

## PROCESSING

<b>Injection</b>	<b>Dry Unit</b>
Drying Temperature	80 °C
Suggested Max Moisture	0.20 %
Rear Temperature	260 to 270 °C
Middle Temperature	265 to 275 °C
Front Temperature	265 to 275 °C
Mold Temperature	60 to 80 °C

### Injection Notes

The material is supplied in airtight bags, ready for use. In case that the virgin material has absorbed moisture, it must be dried with a dehumidified air drying equipment, dew point mini -20°C. Recommended time 2-4h

#### Injection Advice:

- All reinforced, flame retardant compounds generate some level of abrasion/corrosion to the steel processing equipment. These issues may be magnified by using incorrect processing conditions (temperatures, residence time, moisture level ...) during the moulding process. Therefore, Solvay recommends you adhere to the processing conditions detailed in this technical data sheet. For equipment that comes into contact with molten flame retardant compounds, Solvay advises you to use a steel with high chromium and high carbon content (having a minimum concentration of 16% Chromium) to prevent corrosion and abrasion. For the correct reference of steel associated to flame retardant compounds' processing, please refer to your equipment manufacturers. In the case of high requirements on surface quality a mould temperature of up to 120°C can be considered.
- The processing parameters like processing temperatures are a recommendation and can be adjusted in function of injection machine size, part geometry / design



## DISCLAIMER

The information contained in this document is given in good faith based on our current knowledge. It is only an indication and it is in no way binding. This information must on no account be used as a substitute for necessary prior tests which alone can ensure that a product is suitable for a given use. ANY WARRANTY OF PRODUCT PERFORMANCE, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS EXPRESSLY EXCLUDED. Users are responsible for ensuring compliance with local legislation and for obtaining the necessary certifications and authorizations. Users are requested to check that they are in possession of the latest version of this document, and Solvay is at their disposal to supply any additional information.



## SAFETY INFORMATION

---

Detailed information regarding safety are available on the safety data sheet (SDS). SDS is sent with the first material order or available by contacting our customer services

## REGULATIONS COMPLIANCE

---

This product is not intended to be used for the following regulated market: food contact, drinking water, toys, cosmetics or medical devices.

This grade complies with ROHS Directive 2011/65/EU and 2015/863 as amended.

Grades produced or imported in Europe comply with REACH directive 1907/2006/EC as amended.

## CUSTOMER SERVICES

---


Our customer services are not only concerned with manufacturing and supply of Engineering Plastics products. We are available to assist our customers in finding technical solutions that meet their requirements. Specific support is in particular offered on:

- Material selection
- Material testing
- Parts design advice, training for design engineers
- Part testing
- Design simulation
- Processing through different technologies
- Assembly and post-processing technology expertise
- Parts optimization through Computer Aided Design

You can find more information on Solvay Product range on our internet product finder at the following address:  
<http://www.technyl.com>

### MULTIPOINT DATA

Isothermal Stress vs. Strain (ISO 11403-1)

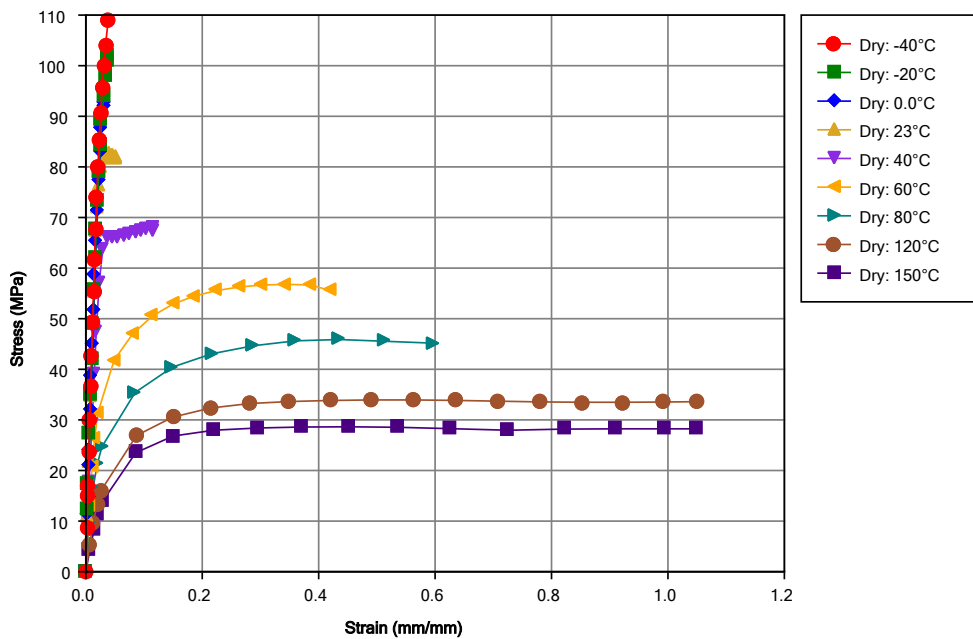

#### Notes

Typical properties: these are not to be construed as specifications.

Solvay Engineering Plastics

[www.solvay.com](http://www.solvay.com) - [www.technyl.com](http://www.technyl.com)

Tel: 00 800 55 400 600

[technyl-emea@solvay.com](mailto:technyl-emea@solvay.com) - Europe, Middle East, Africa

[technyl-apac@solvay.com](mailto:technyl-apac@solvay.com) - Asia Pacific

[technyl-americas@solvay.com](mailto:technyl-americas@solvay.com) - Americas



**SOLVAY**

asking more from chemistry<sup>®</sup>