

TECHNYL®

TECHNYL® A 216 V30 NATURAL

TECHNICAL DATA SHEET

Revised: February, 2018

TECHNYL® A 216 V30 Natural is a polyamide 66, reinforced with 30% of glass fiber, for injection moulding. This grade offers an excellent combination between thermal and mechanical properties.

GENERAL

Material Status	• Commercial: Active
Availability	• Africa & Middle East • Asia Pacific • Europe • Latin America • North America
Filler / Reinforcement	• Glass Fiber, 30% Filler by Weight
Key Benefits	• Good Dimensional Stability • Good Flow • Good Mold Release • Translucency
Applications	• Outdoors activities • Sports equipment • Structural parts • Switch, Plug, Control & Sockets • White appliances
Certification/Compliance	• EC 1907/2006 (REACH) • UL QMFZ2
RoHS Compliance	• RoHS Compliant
Automotive Specifications	• GM QK 003013 Color: Natural • IMDS ID 20402274 Color: Natural • IMDS ID 20402274/2
Colors Available	• Black • Grey • Natural Color • Red • White
Forms	• Pellets
Processing Method	• Injection Molding
Resin ID (ISO 1043)	• PA66-GF30

PROPERTIES

Typical values of properties are for Natural grades

Physical	Dry	Conditioned	Unit	Test Method
Molding Shrinkage				ISO 294-4
Across Flow	1.1		%	
Flow	0.40		%	
Water Absorption (24 hr, 23°C)	0.80		%	ISO 62
Density	1.36		g/cm ³	ISO 1183/A
Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus (23°C)	10000	7500	MPa	ISO 527-2/1A
Tensile Stress (Break, 23°C)	190	135	MPa	ISO 527-2/1A
Tensile Strain (Break, 23°C)	3.0	7.0	%	ISO 527-2
Flexural Modulus				
23°C	9400		MPa	ASTM D790
23°C	9100	6300	MPa	ISO 178

Solvay Engineering Plastics

www.solvay.com - www.technyl.com

Tel: 00 800 55 400 600

technyl-emea@solvay.com - Europe, Middle East, Africa

technyl-apac@solvay.com - Asia Pacific

technyl-americas@solvay.com - Americas

Page: 1 of 5



SOLVAY

asking more from chemistry®

Mechanical	Dry	Conditioned	Unit	Test Method
Flexural Stress				
23°C	305	220 MPa		ISO 178
Break, 23°C	280	MPa		ASTM D790
Charpy Notched Impact Strength (23°C)	12	16 kJ/m ²		ISO 179/1eA
Charpy Unnotched Impact Strength				
23°C	80	95 kJ/m ²		ISO 179/1eU
23°C	70	kJ/m ²		ISO 179/1fU
Notched Izod Impact Strength (23°C)	11	15 kJ/m ²		ISO 180/A
Thermal	Dry	Conditioned	Unit	Test Method
Heat Deflection Temperature				
0.45 MPa, Unannealed	260	°C		ISO 75-2/Bf
1.8 MPa, Unannealed	255	°C		ISO 75-2/Af
Melting Temperature	262	°C		ISO 11357-3
Electrical	Dry	Conditioned	Unit	Test Method
Surface Resistivity	6.0E+15	1.0E+13 ohms		IEC 60093
Volume Resistivity	1.0E+15	2.0E+15 ohms·cm		IEC 60093
Electric Strength (2.00 mm)	40	30 kV/mm		IEC 60243-1
Relative Permittivity	3.75	4.00		IEC 60250
Dissipation Factor	0.010	0.11		IEC 60250
Comparative Tracking Index				IEC 60112
Solution A	600	600 V		
Solution B	500	500 V		
Flammability	Dry	Conditioned	Unit	Test Method
Flame Rating				UL 94
0.8 mm	HB			
1.6 mm	HB			
3.2 mm	HB			
Glow Wire Flammability Index				IEC
1.6 mm	650	°C		60695-2-12
3.2 mm	750	°C		
Glow Wire Ignition Temperature (1.6 mm)	650	°C		IEC 60695-2-13
Oxygen Index	23	%		ISO 4589-2

PROCESSING

Injection	Dry Unit
Drying Temperature	80 °C
Suggested Max Moisture	0.20 %
Rear Temperature	270 to 280 °C

Injection**Dry Unit**

Middle Temperature	275 to 285 °C
Front Temperature	280 to 290 °C
Mold Temperature	70 to 100 °C

Injection Notes

The material is supplied in airtight bags, ready for use. In case that the virgin material has absorbed moisture, it must be dried with a dehumidified air drying equipment, dew point mini -20°C. Recommended time 2-4h

Injection Advice:

- For reinforced polyamides, Solvay recommends the use of steel with a high content of carbon, and purified for polishing, to avoid or limit the abrasion. For example: X38CrMoV5-1 (EN Norm) - 1.2367 /1.2343 (DIN Norm) or X160CrMoV12 (EN Norm) - 1.2601 /1.2379 (DIN Norm). In the case of high requirements on surface quality a mould temperature of up to 120°C can be considered.
- The processing parameters like processing temperatures are a recommendation and can be adjusted in function of injection machine size, part geometry / design

DISCLAIMER

The information contained in this document is given in good faith based on our current knowledge. It is only an indication and it is in no way binding. This information must on no account be used as a substitutive for necessary prior tests which alone can ensure that a product is suitable for a given use. ANY WARRANTY OF PRODUCT PERFORMANCE, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS EXPRESSLY EXCLUDED. Users are responsible for ensuring compliance with local legislation and for obtaining the necessary certifications and authorizations. Users are requested to check that they are in possession of the latest version of this document, and Solvay is at their disposal to supply any additional information.



SAFETY INFORMATION

Detailed information regarding safety are available on the safety data sheet (SDS). SDS is sent with the first material order or available by contacting our customer services

REGULATIONS COMPLIANCE

This product is not intended to be used for the following regulated market: food contact, drinking water, toys, cosmetics or medical devices.

This grade complies with ROHS Directive 2011/65/EU and 2015/863 as amended.

Grades produced or imported in Europe comply with REACH directive 1907/2006/EC as amended.

CUSTOMER SERVICES


Our customer services are not only concerned with manufacturing and supply of Engineering Plastics products. We are available to assist our customers in finding technical solutions that meet their requirements. Specific support is in particular offered on:

- Material selection
- Material testing
- Parts design advice, training for design engineers
- Part testing
- Design simulation
- Processing through different technologies
- Assembly and post-processing technology expertise
- Parts optimization through Computer Aided Design

You can find more information on Solvay Product range on our internet product finder at the following address:
<http://www.technyl.com>

MULTIPOINT DATA

Isothermal Stress vs. Strain (ISO 11403-1)

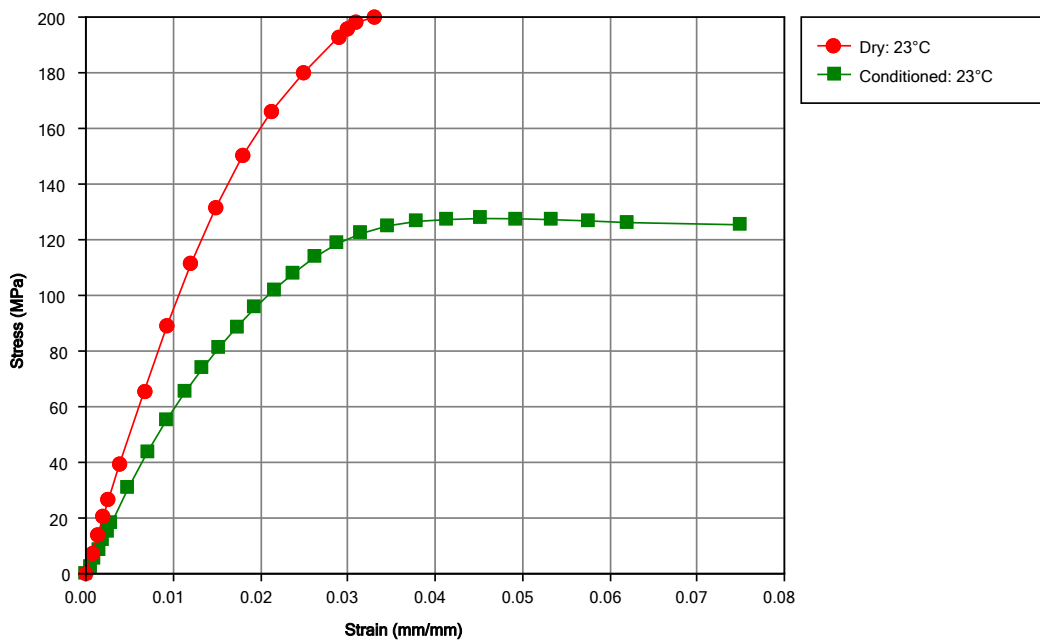

Notes

Typical properties: these are not to be construed as specifications.

Solvay Engineering Plastics
www.solvay.com - www.technyl.com

Tel: 00 800 55 400 600
 technyl-emea@solvay.com - Europe, Middle East, Africa
 technyl-apac@solvay.com - Asia Pacific
 technyl-americas@solvay.com - Americas